

**ICBDD36****FEATURES**

- 
- Heavy-gauge stainless steel
- 
- Lowers when not in use
- 
- Adjustable discharge lets you negotiate around ducting
- 
- Delay-off feature
- 
- Delay-off feature shuts off blower after approximately 5 minutes
- 
- Reversible motor box can be installed on either side of the downdraft
- 
- Blower required (internal blower available)
- 
- Remote control operation from up to 3 m away
- 
- Rises 356 mm to whisk away smoke and odours
- 
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- 
- Exceptional support from our Customer Care team
- 

**ACCESSORIES**

- 
- Recirculation Kit
- 
- Make-up air damper
- 

Accessories available through an authorized Sub-Zero dealer.  
For local dealer information, visit [subzerowolf.hk](http://subzerowolf.hk).

**BLOWER OPTIONS**


- 900 CMH Internal Blower
- 1528 CMH Remote Blower
- 2028 CMH Remote Blower

**PRODUCT SPECIFICATIONS**

Model	ICBDD36
Dimensions	914 mm W x 356 mm H x 51 mm D
Weight	36 kg
Electrical Supply	220-240 VAC; 50/60 Hz
Electrical Service	0.4 kW
Discharge Location	Vertical or Horizontal
Discharge Dimensions	152 (6") mm round internal or 254 (10") mm round remote
Receptacle	3-prong grounding-type


**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

**DIMENSIONS**

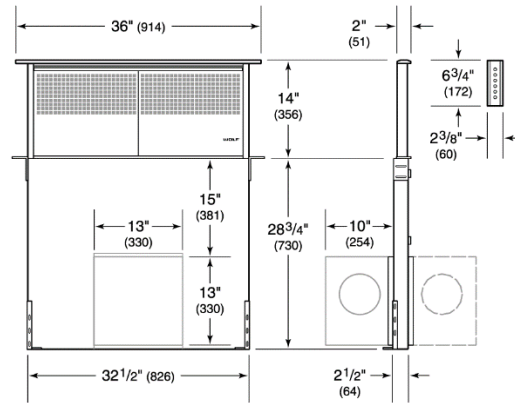

**NOTE:** Shown with front mounted internal blower with 6" (152) round discharge, dashed line represents rear mount.

**STANDARD INSTALLATION**

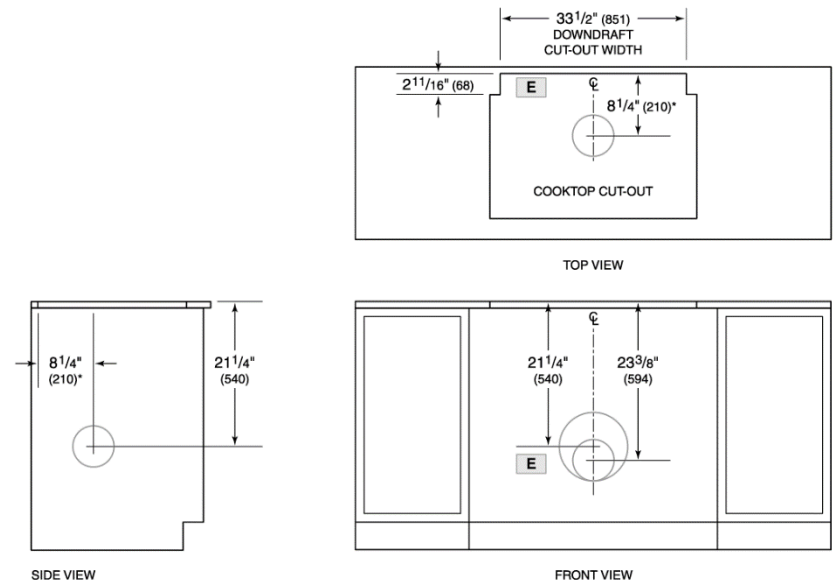

\*6" (152) back from countertop cut-out when internal blower is rear mounted.

**NOTE:** Internal blower 6" (152) round, side, rear or bottom discharge. In-line and remote blower 10" (254) round, rear discharge. Centerline indicates center of downdraft cut-out.