

**ICBCI243TF/S****FEATURES**

Incredible cooking control, with lightning fast high heat and very low lows

Three elements and bridging option to accommodate different pan sizes

Pair with module cooktops for a custom cooking array

Efficiently transfers heat, because energy is supplied directly to the cookware

Cookware sensing guards against hot burners being left on

Cooktop stays relatively cool for added safety and easy cleanup

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional support from our Customer Care team

**ACCESSORIES**

Filler Strip

Accessories available through an authorized dealer.  
For local dealer information, visit [subzerowolf.com.hk](http://subzerowolf.com.hk)

**COOKTOP SPECIFICATIONS**


- 1 - 2100 W Element
- 1 - 2100 W Element with 3000 W Boost
- 1 - 2600 W Element with 3150 W Boost



PRODUCT SPECIFICATIONS


Model	ICBCI243TF/S		
Dimensions	600 mm W x 51 mm H x 533 mm D		
Shipping Weight	19 kg		
Electrical Supply	Single Phase	220-240 VAC	50/60 Hz
	3 Phase	380-415 VAC	50 Hz
Electrical Service	Single Phase	30 A	
	3 Phase	16 A	
Power Cord	1.2 m		

ELECTRICAL




**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified


DIMENSIONS

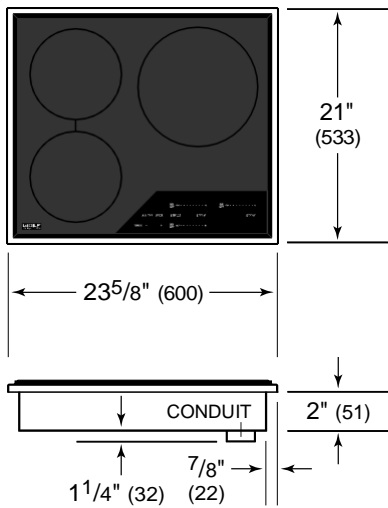

STANDARD INSTALLATION

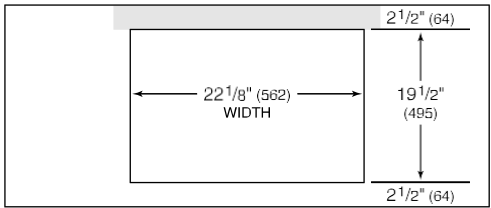

COUNTERTOP CUT-OUT

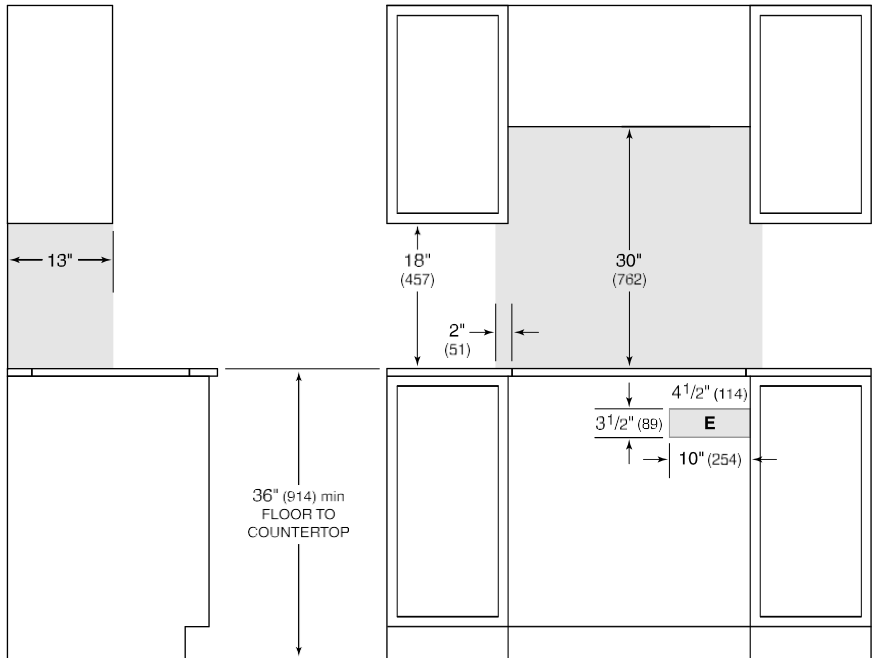

SIDE VIEW

FRONT VIEW

**NOTE:** Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.  
Electrical supply location only applies to installations with built-in oven.