

ICBCL4250S/S



FEATURES

ClearSight™ LED lighting system fully illuminates the interior and reduces shadows

Night Mode optimizes the interior lighting based on the detected ambient light, reducing the brightness by 90% in dim environments

Touch control panel is conveniently located for easy access at the tap of a finger

Sleek stainless accents trim the interior, matching the sophistication of the exterior

Stainless-steel exterior and pro or tubular handles to match other Sub-Zero and Wolf products

Split Climate™ intelligent cooling system revolutionizes Sub-Zero's already-superior preservation capabilities, keeping food even fresher for longer

Lift the base of the flip-up dairy compartments to store taller items on the shelf below

Fresh-tasting, odorless, filtered ice ready on-demand and activate Max Ice Mode to temporarily increase ice production

Position adjustable door bins at various heights to accommodate assorted items

Sub-Zero offers an industry-leading full two-year warranty on appliances

ACCESSORIES

Air Purification Cartridge

Egg Container

Water Filter Cartridge


Stainless Steel Side Panel

Side panel mounting kit

90° door stop

Stainless steel kickplate

Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/hk.

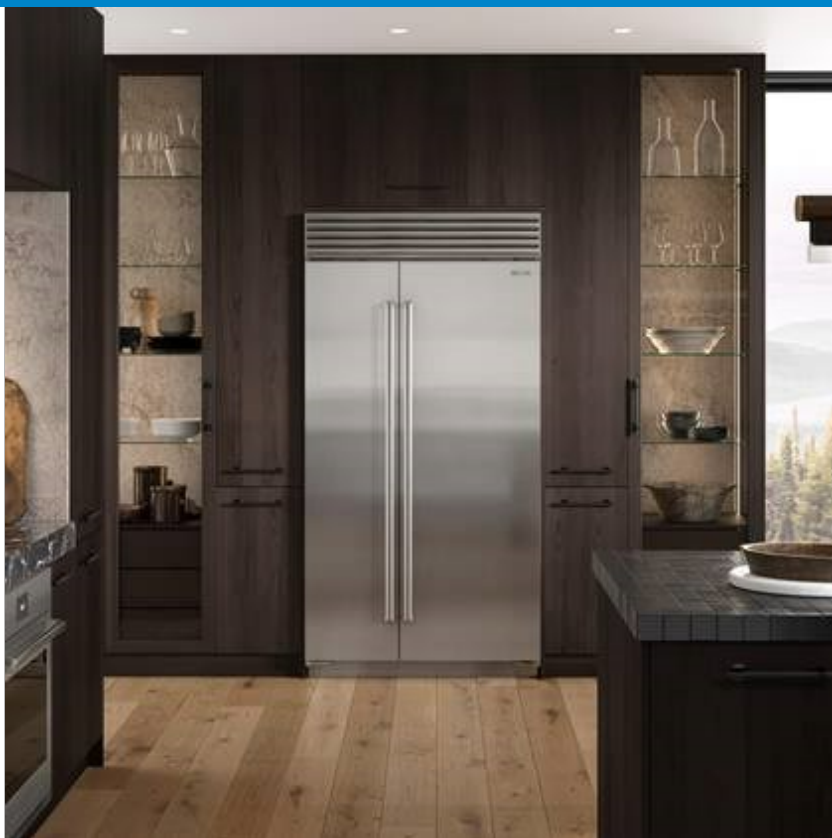

HANDLE OPTIONS

PRO



TUBULAR



PRODUCT DETAILS

REFRIGERATOR

- 5 glass refrigerator shelves (4 adjustable; 1 stationary)
- 4 crisper drawers with removable dividers
- 5 refrigerator door bins (3 adjustable; 2 stationary)
- Air purification system
- LED refrigerator and freezer lights


FREEZER

- 5 adjustable door bins
- 2 storage drawers
- Ice drawer with automatic ice maker
- Water filtration system


PRODUCT SPECIFICATIONS

| | |
|--------------------------|----------------------------------|
| Model | ICBCL4250S/S |
| Dimensions | 1067 mm W x 2134 mm H x 610 mm D |
| Shipping Weight | 281 kg |
| Fridge Storage Capacity | 439 L |
| Freezer Storage Capacity | 243 L |
| Door Clearance | 668 mm |
| Electrical Supply | 220-240 VAC; 50/60 Hz |
| Electrical Service | 2 A |
| Receptacle | 3-prong grounding-type |
| Water Pressure | 2.4-3.6 bar |
| Power Cord | 2 m |

ELECTRICAL




PLUMBING




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

INTERIOR VIEW

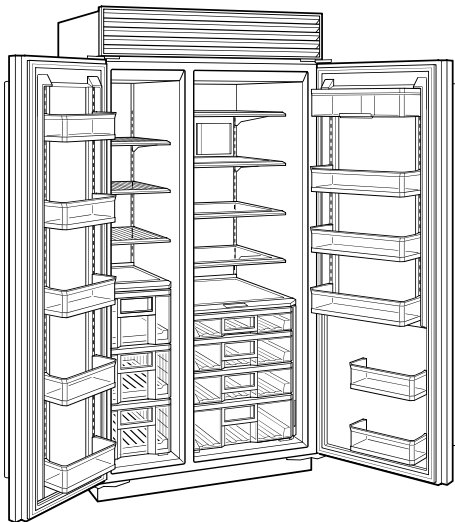


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

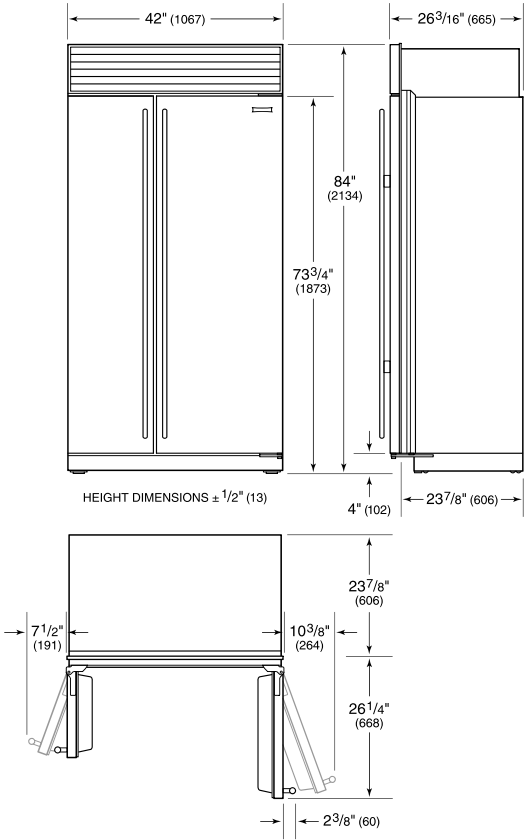

STANDARD INSTALLATION

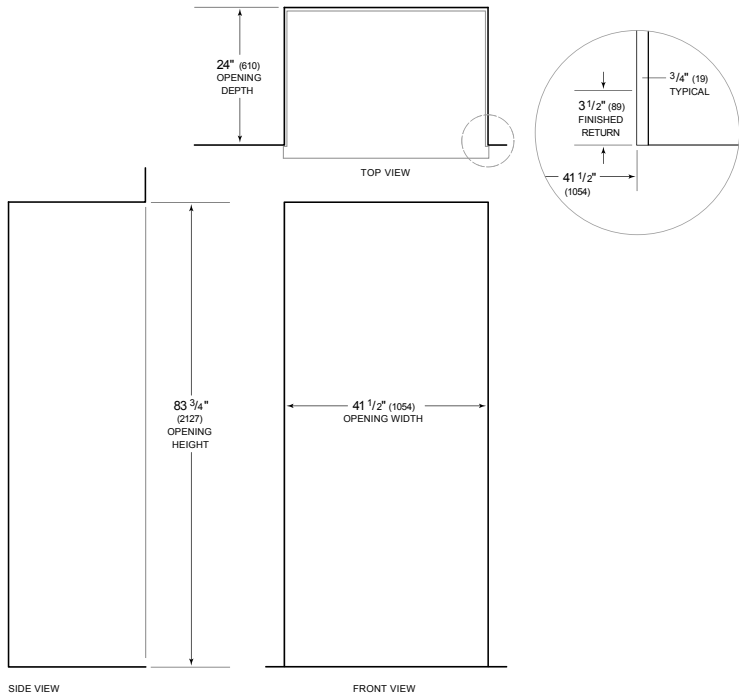

NOTE: 3 1/2" (89) finished returns will be visible and should be finished to match cabinetry. Shaded line represents profile of unit. Requires extra 40mm depth for power socket and water connection.