

ICBDEC3050W



FEATURES

Offers any-occasion-146-bottle capacity

Easily customize settings with the tap of a finger via the conveniently accessible touch control panel

Store reds and whites in separate temperature zones that keep wines at proper serving temperatures, within one degree of setpoint

Full-extension wine racks provide easy access to standard-size bottles, half bottles, and magnums without agitating others

UV-resistant glass door shields wine from harmful light

Inventory tile system aids collection organization

Accepts custom panels for an integrated look within cabinetry or stainless-steel accessory panels and handles to match other Sub-Zero and Wolf products

ACCESSORIES

Bulk Storage Drawer

Dessert Wine Rack

Door Lock Kit

Reduced Toe Kick Divider

Stainless Steel Side Panel

Wine Inventory Tiles

Wine Inventory Tiles - Writable

Dual Installation Kits

Stainless Steel Pro Handles

Stainless Steel Tubular Handles

Stainless Steel Door Panels With Tubular Handle

Stainless Steel Door Panels With Pro Handle

Solid Panel-Ready Door

Stainless Steel Dual Installation Kickplates

Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com.hk



HANDLE ACCESSORIES

PRO




TUBULAR



PRODUCT SPECIFICATIONS

Model	ICBDEC3050W
Dimensions	762mm W x 2134 mm H x 610 mm D
Door Clearance	724 mm
Weight	203 kg
Electrical Supply	220-240 VAC, 50/60 Hz
Electrical Service	0.4 A
Wine Storage Capacity	146 Bottles (750ml)
Electrical Cord	2 m

ELECTRICAL




NOTE: The electrical outlet must be positioned with the grounding prong to the right of the thinner blades.

PANEL SPECIFICATIONS For complete panels specifications including width/height, weight requirements and thickness requirements visit subzero-wolf.com.hk



NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

INTERIOR VIEW

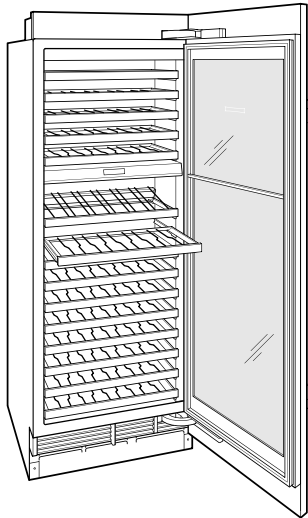


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

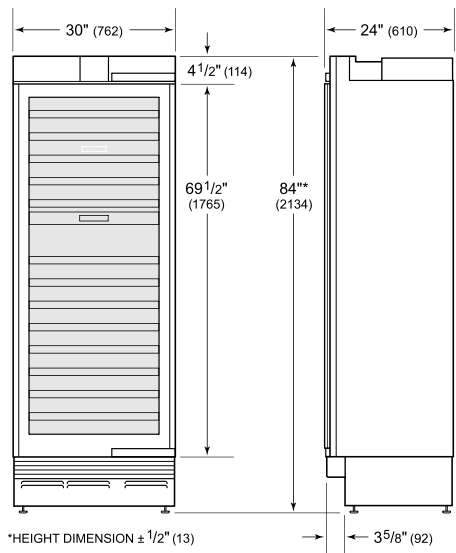

STANDARD INSTALLATION

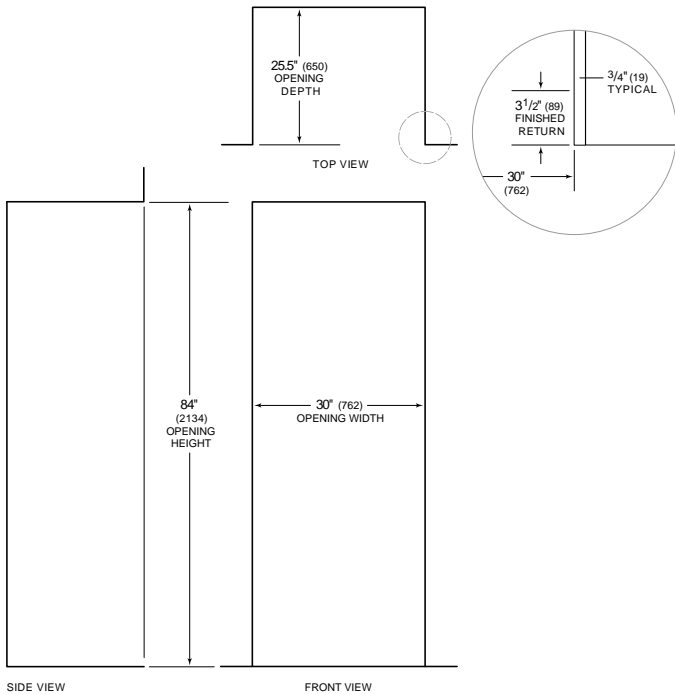

NOTE: 3 1/2" (89) finished returns will be visible and should be finished to match cabinetry. Requires extra 40mm depth for power socket and water connection.