

ICBDO3050CM/S



FEATURES

- Cook for a crowd, with two ovens and twice the capacity
- Preheats faster and cooks more consistently across all racks due to its advanced Dual VertiFlow™ convection system
- Assures predictably delicious results with a variety of modes, including Convection Roast, Proof, and Dehydrate
- Prepares 50 popular dishes with the Gourmet feature that automatically adjusts cook times and temperatures
- Handles multiple dishes simultaneously with our largest capacity oven (13 percent larger)
- Insert a temperature probe to tell you exactly when it is done—and in gourmet mode, it will alert you the moment the dish is ready.
- Uncomplicate cooking with innovative, interactive color touchscreen controls
- Blends in with a sleek stainless steel, handleless design
- Integrates beautifully into surrounding cabinetry with flush installation
- Ensures excellent visibility via three bright halogen lights and large, triple-panel-glass door windows
- Master your technique with tips and recipes from the Mastering the M series oven guide

ACCESSORIES

- Broiler Pan
- Full-Extension Ball-Bearing Oven Rack
- Premier Baking Sheet
- Standard Oven Rack
- Bake Stone Kit
- Dehydration Kit
- Multi-Function Pan
- Temperature Probe
- Accessories available through an authorized dealer.  
For local dealer information, visit [subzero-wolf.com/hk](https://subzero-wolf.com/hk)




76 CM M SERIES CONTEMPORARY STAINLESS STEEL BUILT-IN DOUBLE OVEN -  
FLUSH INSTALLATION



PRODUCT SPECIFICATIONS


Model	ICBDO3050CM/S
Dimensions	759 mm W x 1292 mm H x 584 mm D
Oven Interior Dimensions	641 mm W x 444 mm H x 504 mm D
Shipping Weight	211 kg
Overall Capacity	144 L
Usable Capacity	125 L
Door Clearance	543 mm
Electrical Supply	Single Phase: 220-240 V AC, 50/60 Hz 3-Phase: 380-415 V AC, 50 Hz
Electrical Service	Single Phase: 8.2-9.6 kW 3-Phase: 4.2-4.8 kW
Power Cord	1.2 m

ELECTRICAL




**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

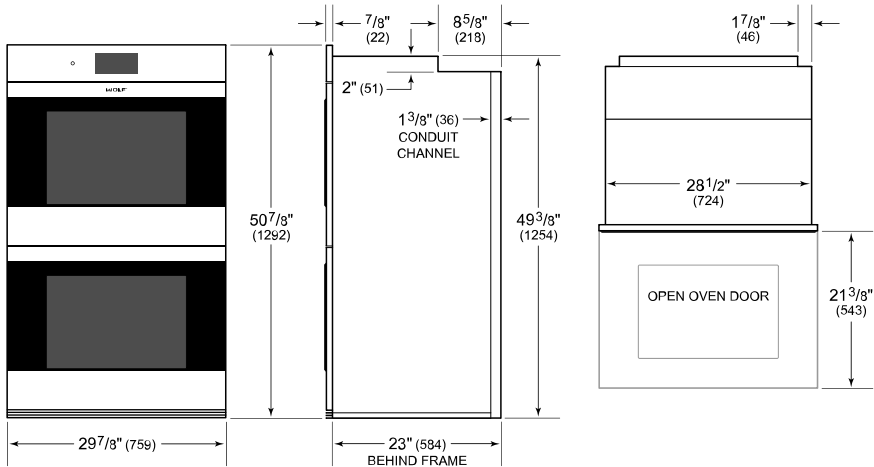

FLUSH INSTALLATION

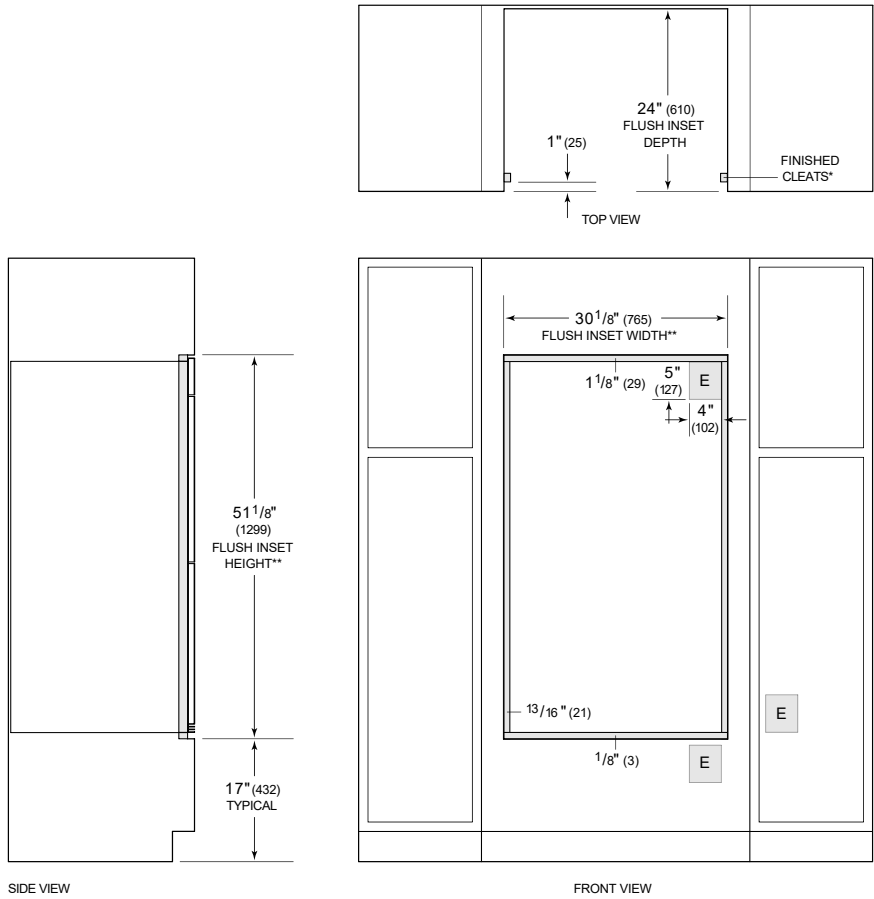

\*1" (25) minimum depth. Shaded areas will be visible and should be finished to match cabinetry.  
\*\*Dimension provides minimum reveals  
**NOTE:** Location of electrical supply within opening may require additional cabinet depth.