# 76 CM M SERIES TRANSITIONAL BUILT-IN DOUBLE OVEN - STANDARD INSTALLATION

#### ICBDO3050TM/S/T

### **FEATURES**

Cook for a crowd, with two ovens and twice the capacity

Preheats faster and cooks more consistently across all racks due to its advanced Dual VertiFlow™ convection system

Assures predictably delicious results with a variety of modes, including Convection Roast, Proof, and Dehydrate

Prepares 50 popular dishes with the Gourmet feature that automatically adjusts cook times and temperatures

Handles multiple dishes simultaneously with our largest capacity oven (13 percent larger)

Insert a temperature probe to tell you exactly when it is done—and in gourmet mode, it will alert you the moment the dish is ready.

Uncomplicate cooking with innovative, interactive color touchscreen controls

Blends in with a sleek stainless steel, handleless design

Integrates beautifully into surrounding cabinetry with flush installation

Ensures excellent visibility via three bright halogen lights and large, triplepanel-glass door windows

Master your technique with tips and recipes from the Mastering the M series oven guide

### ACCESSORIES

Broiler Pan

Full-Extension Ball-Bearing Oven Rack

Premier Baking Sheet

Standard Oven Rack

Bake Stone Kit

Dehydration Kit

Multi-Function Pan

**Temperature Probe** 

Accessories available through an authorized dealer. For local dealer information, visit subzero-wolf.com/hk




MOLF

Specifications are subject to change without notice. This information was generated on April 03, 2024. Verify specifications prior to finalizing your cabinetry/enclosures.

## **PRODUCT SPECIFICATIONS**


Model	ICBDO3050TM/S/T
Dimensions	759 mm W x 1292 mm H x 584 mm D
Oven Interior Dimensions	641 mm W x 444 mm H x 504 mm D
Shipping Weight	211 kg
Overall Capacity	144 L
Usable Capacity	125 L
Door Clearance	543 mm
Electrical Supply	Single Phase: 220-240 V AC, 50/60 Hz 3-Phase: 380-415 V AC, 50 Hz
Electrical Service	Single Phase: 8.2 - 9.6 kW 3-Phase: 4.2-4.8 kW
Power Cord	1.2 m

#### **ELECTRICAL**




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

## DIMENSIONS

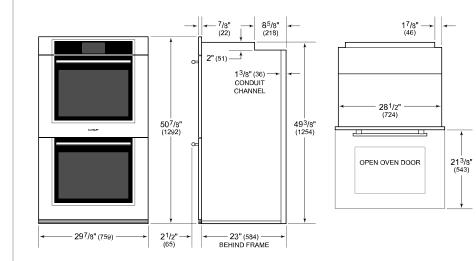

# STANDARD INSTALLATION

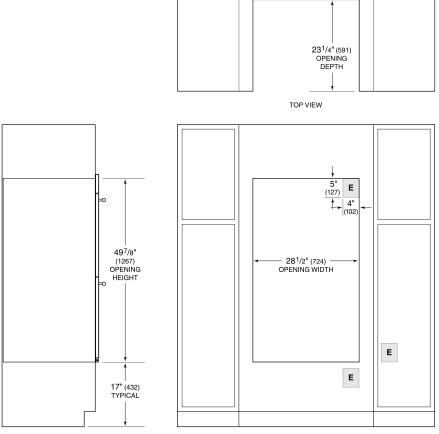

SIDE VIEW

FRONT VIEW

NOTE: Location of electrical supply within opening may require additional cabinet depth.