ICBIR36550/S/T



FEATURES

The scratch-resistant, ceramic glass induction cooking surface provides consistent, precise temperature control and nearly instantaneous temperature adjustment response

Wolf's Dual VertiFlow™ convection system provides reliably even heat, reduces hot and cold spots, and enables consistent multi-rack cooking

Gourmet Mode features nearly 50 presets that automatically control the oven to ensure delicious results

Ten cooking modes, including Bake, Broil, Convection, Convection Roast, Dehydrate, Gourmet, Proof, Roast, Stone, and Warm, were developed by Wolf chefs to maximize the performance of your oven

The sleek rangetop features a striking interactive display. The full-color touch screen is intuitive, easy to read, and locks for safety and cleaning

Boost Mode delivers rapid heat for 40% faster boil times, rivaling the speed of gas and electric

The Bridge function joins two induction zones into one large area, enabling use of an induction-capable griddle, open roaster, or fish poacher

Cleaning is simple. The smooth, black ceramic glass surface resists scratching and staining, and wipes clean

The oven offers self-clean, delayed start, timed cook, and Sabbath features

The temperature probe alerts you when your dish has reached the desired temperature

The range's stainless steel construction and clean lines coordinate elegantly with a full suite of transitional style Sub-Zero and Wolf appliances

ACCESSORIES

76 cm Broiler Pan

91 cm Dehydration Rack Set

91 cm Full-Extension Ball-Bearing Oven Rack

91 cm Standard Oven Rack

Bake Stone Kit

Temperature Probe

Rear Caster Covers


Front Leg Extension Covers

Stainless Steel Kickplates

Accessories available through an authorized dealer. For local dealer information, visit subzero-wolf.com/hk



TOP CONFIGURATION




COOKTOP SPECIFICATIONS

- · Five induction zones
- 4 2,100 W Zones with 3,700 W Boost
- 1 2,600 W Zone with 3,700 W Boost


PRODUCT SPECIFICATIONS

Model		ICBIR36550/S/T
Dimensions	911 mm W	x 902 mm H x 718 mm D
Oven Interior Dimensions	794 mm W	x 445 mm H x 508 mm D
Oven Usable Capacity		155 L
Oven Overall Capa	city	178 L
Door Clearance		495 mm
Weight		202 kg
Electrical Supply	Single-phase 3-phase	220-240 VAC, 50/60 Hz 380-415 VAC, 50 Hz
Electrical Service		Single-phase 60 A 3-phase 33 A

DIMENSIONS

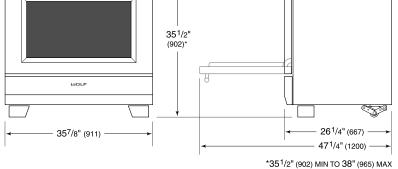

STANDARD INSTALLATION

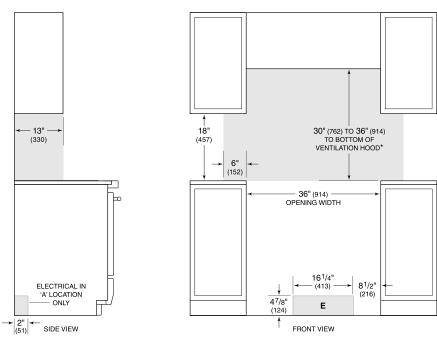

 ${}^*Without\ ventilation\ hood,\ 36'' (914)\ minimum\ clearance\ countertop\ to\ combustible\ materials.$


NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.

MOLF

28¹/4" (718) 27¹/2" (699) 24¹/4" (616)

ELECTRICAL



NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified