

ICBPW482418

FEATURES

Heavy-duty stainless steel construction

Hand finished with hemmed edges and welded seams

Bright halogen lighting

Infinite speed blower control

Recessed controls for sleeker look

Transition with backdraft minimizes backward flow of cold air

Heat sentry for safety

Blower required (internal or remote blowers available)

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional support from our Customer Care team

ACCESSORIES

97 cm high stainless steel backsplash with or without warming racks

15 cm, 30 cm, 46 cm, 61 cm and 76 cm high stainless steel duct covers

Horizontal discharge kit

Make-up air damper

Accessories available through an authorized Sub-Zero dealer.
For local dealer information, visit subzerowolf.com.hk.



BLOWER OPTIONS


- 1014 CMH Internal Blower
- 1528 CMH Internal Blower
- 1859 CMH Internal Blower
- 1528 CMH Remote Blower
- 2028 CMH Remote Blower
- 2535 CMH Remote Blower



PRODUCT SPECIFICATIONS

Model	ICBPW482418
Dimensions	1219 mm W x 457 mm H x 610 mm D
Weight	43 kg
Electrical Supply	220-240 VAC; 50/60 Hz
Electrical Service	0.5 kW
Discharge Location	Vertical orHorizontal
Discharge Dimensions	254 mm (10") Round
Bottom of Hood to Countertop	762 mm to 914 mm

ELECTRICAL

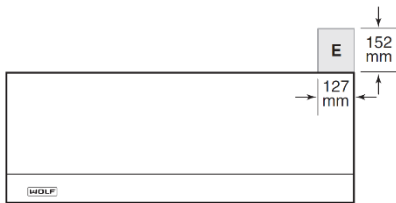

NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

